


PL EN DE DK SK HU RU HR UA LT ES

CZ NL FR IT TR SI FI SE PT NO RO

DEPOSTEP[®]

ANTIFOC DK30







INSTRUCTIUNI DE MONTAJ




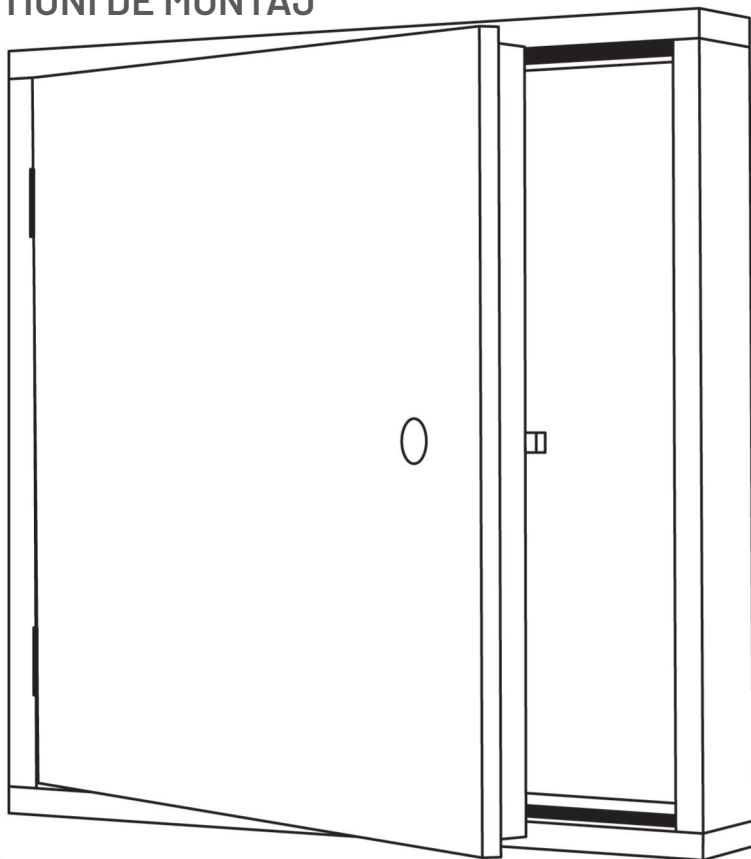





EI 30

IDK8

A = 46 MM, 86 MM

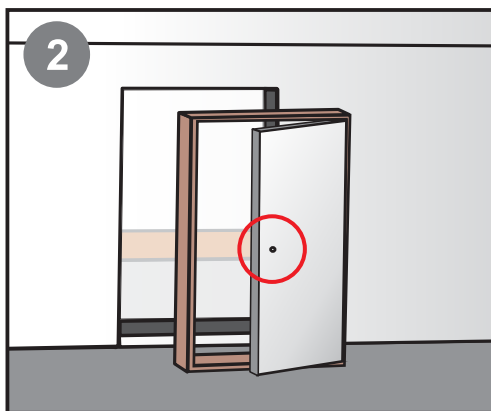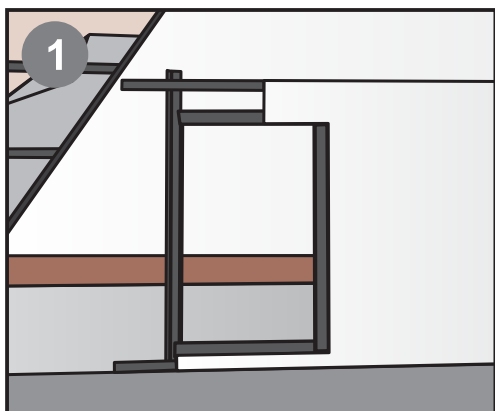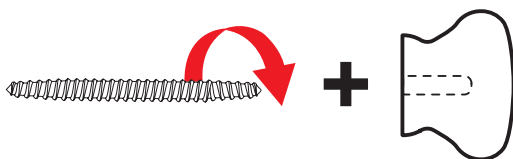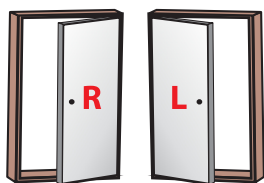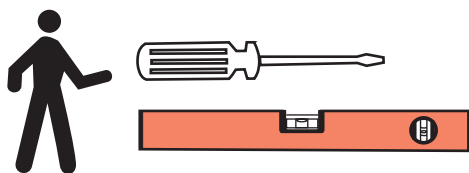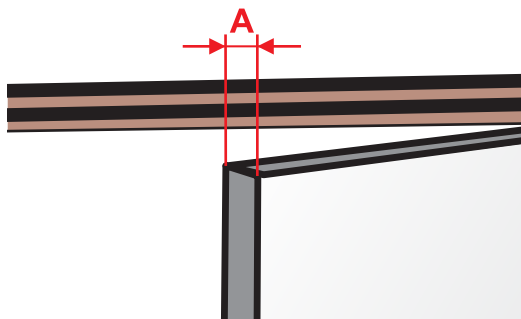

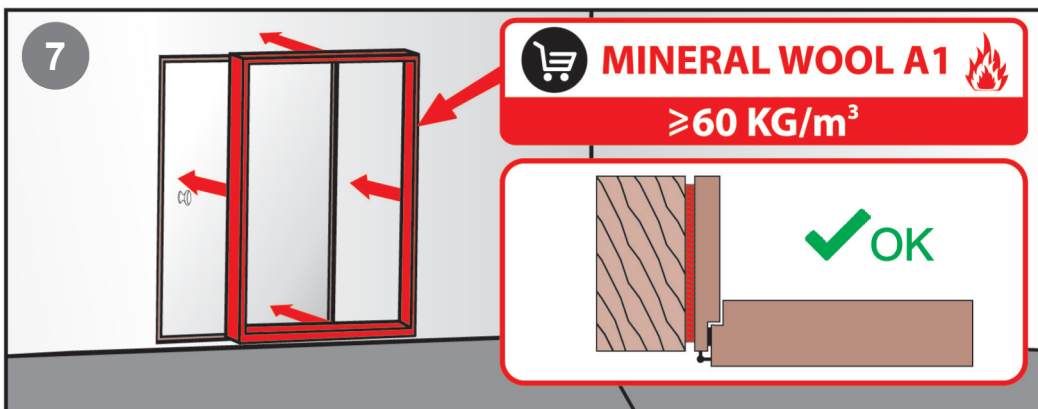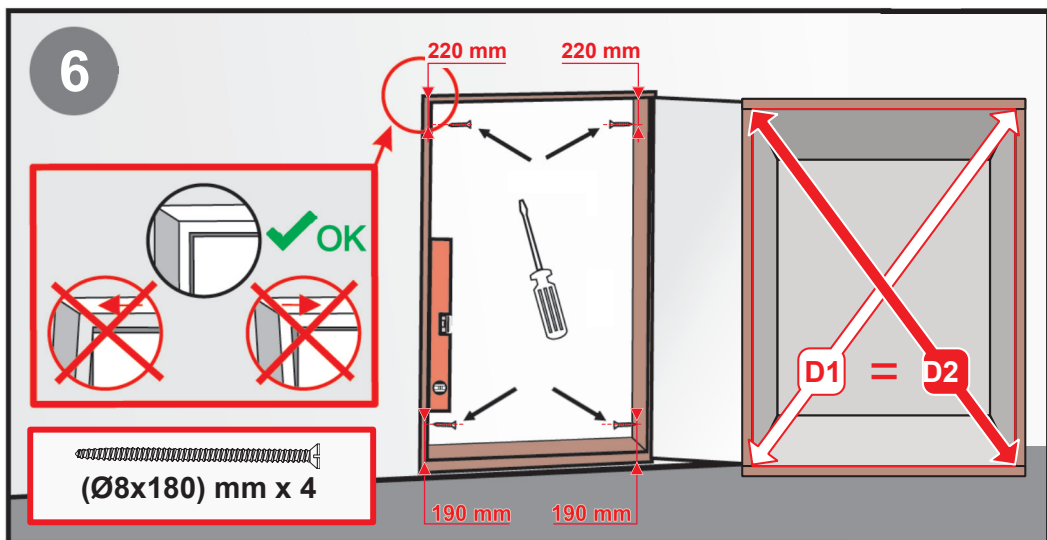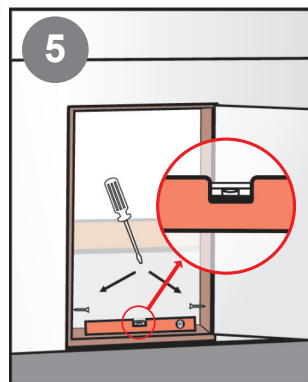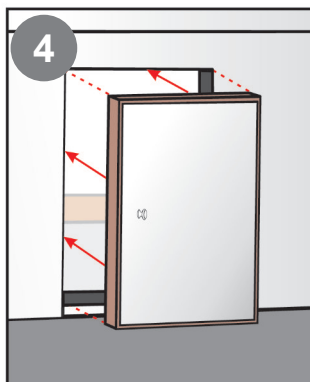

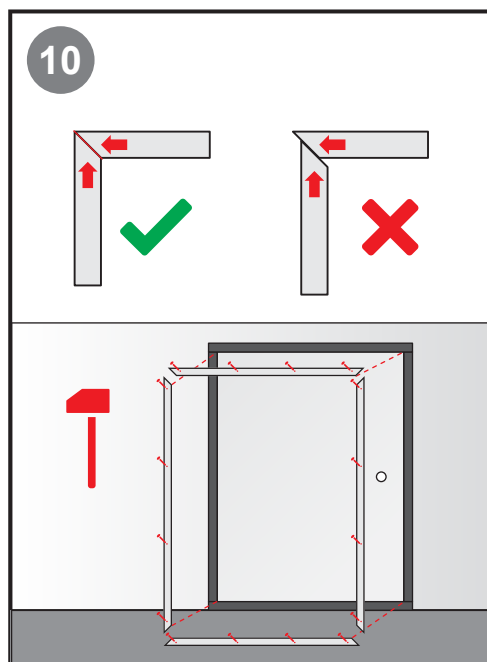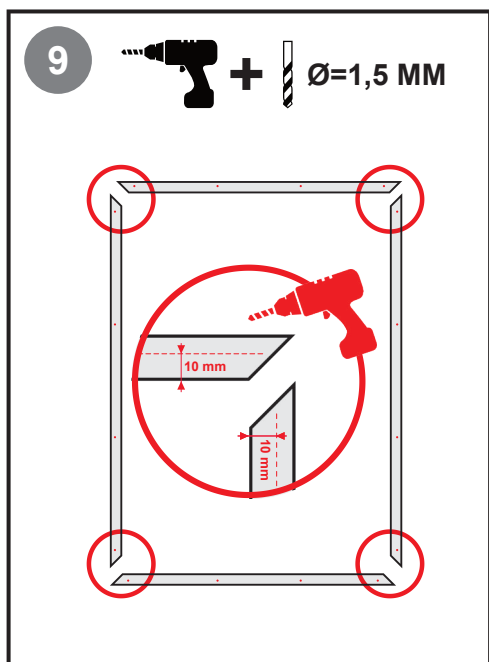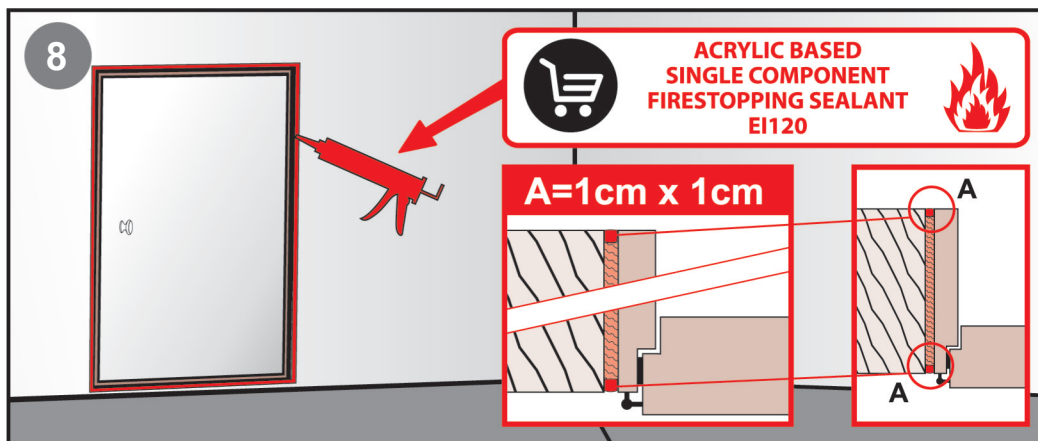

PRODUCT FIXATION

Product is fixed to supporting construction by means of steel screws (Ø8 x 180) mm, two screws placed 220 mm from top edge of hatch door opening and two screws placed 190 mm from bottom edge of hatch door opening.

Gap between hatch door frame and supporting construction is filled by mineral wool ISOVER Uni-Mata with bulk density 60 kg/m³ and sealed from both sides by PROMASEAL®-A